

EVE 402 Air Pollution Generation and Control

Chapter #5 Lectures (Part 5)


© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Wet Collectors

- Water is used to either capture particulate or increase aerosol size
 - *Hygroscopic* particles (those that attract and hold water molecules) “grow”
 - Optimum water droplet diameter: 50 – 1000 μm
- Same collection mechanisms
 - Inertia (assumed dominant mode in models)
 - Interception
 - Diffusion (Brownian motion)


© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Type 1: Spray Chamber Scrubber




© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Type 2: Cyclonic Scrubber



© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Type 3: Venturi Scrubber



© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)


Type 4: Packed Tower



Used primarily for gas adsorption, which we'll get to in Chapter 6

© (www.jbpub.com)

A Simple Model



If stopping distance (x_s) exceeds the original distance from the point where it left the streamline, impaction will occur.

- A particle approaches a droplet and undergoes inertial impaction
- At some point, it leaves the streamline
- Two forces on particle: inertia and drag
- Particle eventually stops (relative to droplet)

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

A Simple Model (2)

- Impaction of particles onto a collector body is characterized by the dimensionless **impaction number (N_I) also known as Stokes number (S_{tk})**
- S_{tk} is a ratio of the particle's stopping distance (x_s) to a characteristic length of the collector body (e.g., diameter of the water droplet, d_D).

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

A Simple Model (3)

$$S_{tk} = N_I = \frac{x_s}{d_D} = \frac{\tau V_{po}}{d_D}$$

where,

- N_I = Impaction Number = S_{tk} = Stokes Number
- x_s = stopping distance
- τ = relaxation time
- V_{po} = initial velocity of the particle relative to the droplet
- d_D = droplet diameter

The **relaxation time (τ)** can be determined by applying a **force balance** on a particle that is decelerating in the horizontal direction

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

The stopping distance (x_s) needs to be determined to calculate S_{tk} . Newton's 2nd law can be used to describe a decelerating particle of constant mass moving in the horizontal direction and assuming Stokes law

$$F_{inertial} + F_{drag} = 0$$


$$\frac{m_p dV_p}{dt} = -\frac{3\pi\mu_g d_p V_p}{K_c}$$

See pages 233 – 236 in your text

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Particle collection efficiency versus Stokes Number

See Figure 5-18, pg. 235




In an ideal situation, an impactor has a "sharp cutoff", i.e., all particles greater than a certain size are collected while all particles smaller than that size pass through. This size is called the **cutoff size**

$$S_{tk} = N_I = \frac{d_p^2 \rho_p K_c V_{po}}{18\mu d_D}$$

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)


Wet Collector Types: More Detail

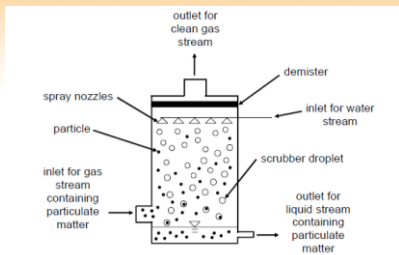

- **Spray chamber scrubber**– typically operates with liquid collector bodies (scrubber droplets) traveling downward and the gas stream containing the particulate contaminant material traveling upward.

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Cyclonic scrubbers, or wet cyclones, atomize droplets of water with a spray bar that is located along the centerline of the cyclone. These droplets then collect particulate matter as they are transported to the outer edge of the cyclone. The liquid also allows cleansing of the walls of the cyclone.




© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Venturi scrubbers work by accelerating the gas stream to velocities around 50 to 150 m/s. The gas stream accelerates because the duct that contains the gas stream is constricted.

Venturi Scrubber and Cyclone Separator

- At throat
1. Static pressure decreases
 2. Velocity increases

$$A_{inlet} : A_{throat} = 4:1$$



© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

- Equations are developed in *Air Pollution: Its Origin and Control* that describe the particle removal efficiency that can be achieved by a venturi scrubber and the pressure drop that results from atomizing the scrubber droplets and accelerating the droplets to approach the same velocity as the gas streams.

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Assumptions used in the development of the venturi scrubber model include:

- Gas velocity is constant throughout the length of the venturi's throat
- Flow is one dimensional, incompressible, and adiabatic
- Particles are collected by the atomized droplets by impaction
- Droplets are uniformly distributed along the cross section of the venturi's throat
- Diameter of the scrubber droplets remain constant
- Volume ratio of the scrubber droplets to the gas stream is small
- Pressure forces around the scrubber droplets are symmetrical and therefore ignored

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

By considering a force balance on the atomized droplets, an equation can be developed that describes how the scrubber droplets accelerate along the length of the venturi's throat and the pressure drop caused by accelerating the droplets. Such a force balance results in the following equation for pressure drop.

$$\Delta P = \beta \rho_L u_g^2 \left(\frac{Q_L}{Q_G} \right)$$

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

$$\Delta P = \beta \rho_L u_g^2 \left(\frac{Q_L}{Q_G} \right)$$

Where,

ΔP = -change in pressure across the length of the venturi's throat
($-(P_2 - P_1)$) = pressure drop

β = correction factor for droplets lost to walls of venturi = 0.85

u_g = velocity of gas in the venturi's throat

$\left(\frac{Q_L}{Q_G} \right)$ = volume ratio of liquid to gas flow rates

$$\Delta P = [\text{cm H}_2\text{O}_{(l)}]$$

$$\beta = [-]$$

$$u_g = [\text{cm/s}]$$

$$\frac{Q_L}{Q_G} = [-]$$

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Calvert Equation (mixture of theory and experimental results)

$$\Delta P = 1.03 \times 10^{-3} u_G^2 \left(\frac{Q_L}{Q_G} \right)$$

ΔP = pressure drop [cm H₂O]

u_G = velocity of gas at the throat [cm/s]

$$\frac{Q_L}{Q_G} = [-]$$

Equation 5-83, page 244

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Hesketh (developed from experimental data)

$$\Delta P = \frac{V_{g,t}^2 \rho_g (A)^{0.133}}{507} (0.56 + 0.125L + 2.3 \times 10^{-3} L^2)$$

ΔP = pressure drop across the venturi [in H₂O]

$V_{g,t}$ = gas velocity at the throat [ft/s]

ρ_g = gas density downstream from the venturi throat [lb/ft³]

A = cross-sectional area of the venturi throat [ft²]

$$L = \text{liquid to gas ratio} \left[\frac{\text{gal}}{1000 \text{ actual ft}^3} \right]$$

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Particle collection **efficiency** achieved by a venturi scrubber has been described by considering the removal of particles due to **impaction, pressure drop, contaminant particle diameter, viscosity of the gas stream, and densities of the scrubber liquid** droplets and contaminant particles as in the next slide.

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Graded Venturi Collection Efficiency

$$\eta_p = 1 - \exp\left(\frac{-(6.3 \times 10^{-4}) \rho_L \rho_p K_c d_p^2 u_g^2 \left(\frac{Q_L}{Q_G}\right) f^2}{\mu_g^2}\right)$$

where,

- η_p = graded particle collection efficiency [-]
- ρ_L = density of scrubber droplets
- ρ_p = density of particulate contaminant
- K_c = Cunningham correction factor for particulate contaminant [-]
- d_p = diameter of particulate contaminant
- f = experimental coefficient = 0.1 to 0.4 [-]
- μ_g = gas viscosity

Use any set of dimensionally consistent units

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Characteristics of Wet Scrubbers

Advantages	Disadvantages
Possible to achieve high particle collection efficiency	Requires the use of a liquid medium that needs to be treated
Humidifies and cools gas stream	High pressure drop for high particle collection efficiencies
Possible to simultaneously remove particles and gases (even sticky particles)	Corrosion and precipitation can occur
Variable throat area of venturi allows selection of particle collection efficiency	Liquid can freeze

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)

Typical Values for Venturi Scrubbers

$$50 \frac{\text{m}}{\text{s}} < u_g < 100 \frac{\text{m}}{\text{s}}$$

$$0.2 \frac{\text{L}}{\text{m}^3} < \frac{Q_L}{Q_G} < 2.0 \frac{\text{L}}{\text{m}^3}$$

$$5 - 10\% (d_p \sim 0.1\mu\text{m}) < \eta_d < 100\% (d_p \sim 50\mu\text{m})$$

$$10 \text{ cm H}_2\text{O}_{(l)} < \Delta P < 70 \text{ cm H}_2\text{O}_{(l)}$$

© 2009 Jones and Bartlett Publishers, LLC (www.jbpub.com)
